

DiscoverBus™ Wired Humidity Sensor - 3%



A general purpose digital sensor that measures ambient air humidity and temperature.



SMART
OFFICE



SMART
BUILDING



DATA
CENTRE



CLEAN
ROOM



LEARNING
CENTRE




RETAIL
SPACE



FACTORY
PLANT

Measuring the ambient, or surrounding air humidity and temperature, are fundamental driving parameters for many systems, including climate or environmental controls. This digital sensor is factory calibrated, combining high accuracy, low

long term drift and low power consumption. Perfect for monitoring environments using air-conditioning systems, including dehumidifiers, for offices, workrooms, cleanrooms, datacentres, server rooms, plant habitats, food, perishables and other goods storage.

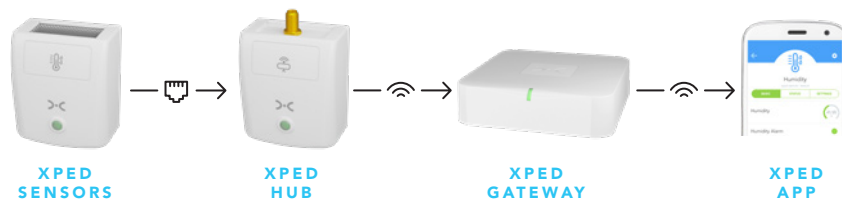

KEY FEATURES:

- > Commercial grade sensor
- > On site operation even without the Internet
- > Remote operation with the Internet
- > Fast install with DiscoverBus™ automatic onboarding to the Hub
- > Nickname support
- > Tap using NFC phone to instantly jump to the control screen
- > Automatic disconnect detect
- > LED flash locate function
- > Wired order determination
- > High and low alerts
- > Configurable sensing sample rate
- > Configurable heartbeat for periodic data
- > Threshold settings to transmit immediate changes
- > Bus voltage status checks and alerts
- > Factory calibrated digital sensor

SPECIFICATIONS:

Supply	DiscoverBus-S (5.0 V)
Onboarding	Automatic on plug in
Data Transport	DiscoverBus-S
Operating Range	(-10 to 70) °C
Humidity Range	(0 to 80) %
Humidity Resolution	0.04 %
Humidity Accuracy	±3 % RH typical (20 to 80) %, ±5 % RH typical (0 to 80) % non-condensing
Temperature Range	(-10 to 70) °C
Temperature Resolution	0.01 °C
Temperature Accuracy	±0.3 °C typical (5 to 60) °C ±0.5 °C typical (-10 to 60) °C
Consumption - Sleep	9 uA typical @ 25 °C
Consumption - Run	9 mA typical @ 25 °C
Dimensions	(61 x 48 x 32) mm (including standard bracket)
Region	Australia, Singapore, Malaysia, USA
Model Number	DB-HUM-133SSN



For more information, visit xped.com

Features and products are continuously being improved, as such specifications are subject to change without notice. Subject to stock holdings, product supply may incur standard manufacturing lead times to be quoted at time of enquiry. Products that utilise radio interfaces such as SubGHz, will be region specific and subject to availability on enquiry.